TANK SIZES & DIMENSIONS

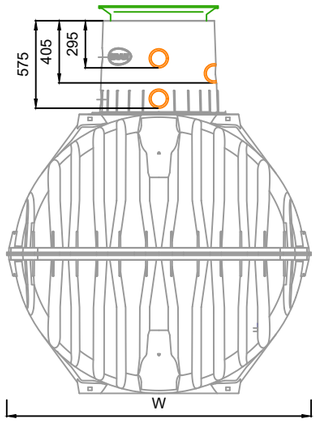

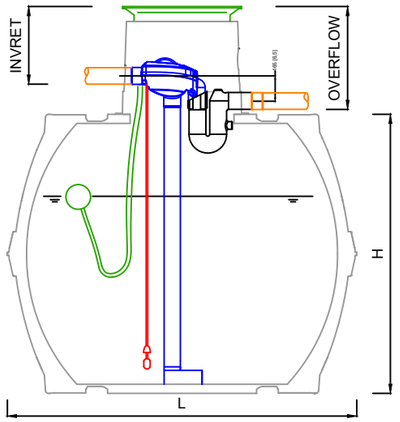

	2,700L	3,750L	4,800L	6,500L
LENGTH	2,080mm	2,280mm	2,280mm	2,390mm
WIDTH	1,565mm	1,755mm	1,985mm	2,190mm
HEIGHT	1,400mm	1,590mm	1,820mm	2,100mm
INVERT	465-765mm	465-765mm	465-765mm	465-765mm
OVERFLOW	630-930mm	630-930mm	630-930mm	630-930mm

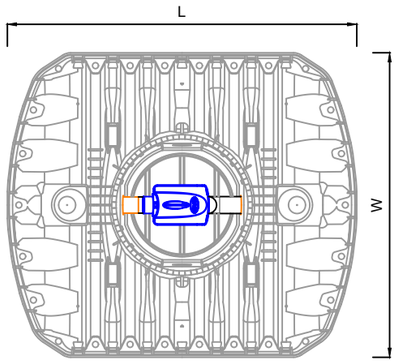

FILTER DETAILS



OPTIMAX PRO FILTER (INTERNAL)

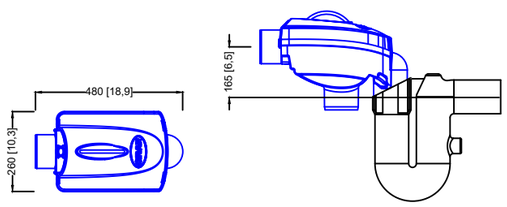

PUMP SPECIFICATION

Model	L_1	L_2	H	ØM
15/4	153.7	391.7	215	118
25/4	182.2	420.2	215	118

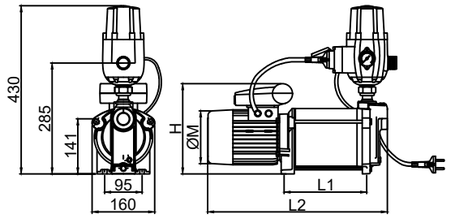

Pump discharge rate in relation to pump head height



SYSTEM ACCESSORIES

HOSE CONNECTION BOX -EXTERNAL (OPTIONAL EXTRA)

HOSE CONNECTION BOX - INTERNAL (OPTIONAL EXTRA)

SPRING WATER SHAFT (OPTIONAL EXTRA)

INTERNAL CLEANING UNIT (STANDARD SUPPLY)

TANK ACCESSORIES

Item	Diameter ø	Min. Height (mm)	Max. Height (mm)	Max. Loading (kg)*
Pedestrian Loading Lid (Mini)	ø 600mm	60mm	360mm	150kg
Pedestrian Loading Lid (Maxi)	ø 600mm	60mm	476mm	150kg
Vehicle Loading Lid	ø 625mm	60mm	476mm	3,500kg
Extension Sleeve (1m)	ø 670mm	500mm	1,000mm	
Extension Sleeve	ø 680mm	250mm		
Tank Dome (Maxi)	ø 650mm	610mm		

* Loading up to 12,000kg achievable (suitable cover to be provided by others)

** Tank Dome (Maxi) available with DN100 or DN150 connections

Pedestrian Loading Lid (Mini)



Pedestrian Loading Lid (Maxi)



Vehicle Loading Lid



Extension Sleeve (1m)

Extension Sleeve



Tank Dome (Maxi)



NOTE:- Tank accessory suitability may vary depending on project. Please contact Graf UK for sizing and support.

THIS DOCUMENT IS SUPPLIED IN STRICT CONFIDENCE AND MUST NOT BE LENT, REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT THE WRITTEN CONSENT OF GRAF UK LIMITED

DO NOT SCALE - IF IN DOUBT ASK

Notice: This drawing is issued only as a guideline and is an estimate of the materials required to construct the drainage system, it should not be used for construction purposes.

Graf UK Ltd makes no warranty or guarantee in relation to the suitability of any of the layout details shown on this drawing in relation to a particular scheme.

NOTES:-

1. All dimensions in mm, unless otherwise stated.
2. All dimensions are nominal and may vary within manufacturing tolerances.
3. All site temporary enabling works by others.
4. Graf products to be installed in strict accordance with Graf recommendations.
5. This drawing is intended for guidance only. Confirmation of the suitability for a particular project should be sought from the consulting engineers prior to final design or commencement of any construction works.

AA SILENTIO CARAT-S SPECIFICATION

REV.	DESCRIPTION	BY	DATE
P0	LATEST REVISION	KS	08/09/2025

GRAF UK Limited
GRAF UK Limited. Regen House, Beaumont Road, Banbury, Oxfordshire. OX16 1RH
T: 01608 661500 F: 01295 211333
E: info@grafuk.co.uk www.grafuk.co.uk

DRAWN : KS DATE : 08/09/2025
CHECKED : FC SCALE : VARIOUS@A3

PROJECT
GRAF STANDARD DETAILS

DESCRIPTION
AA SILENTIO
RAINWATER HARVESTING SYSTEM
CARAT-S TANK

DRAWING No. AA_SILENTIO_STANDARD_DETAIL_CARAT-S
REV. P0

AA SILENTIO CARAT-S SCHEMATIC

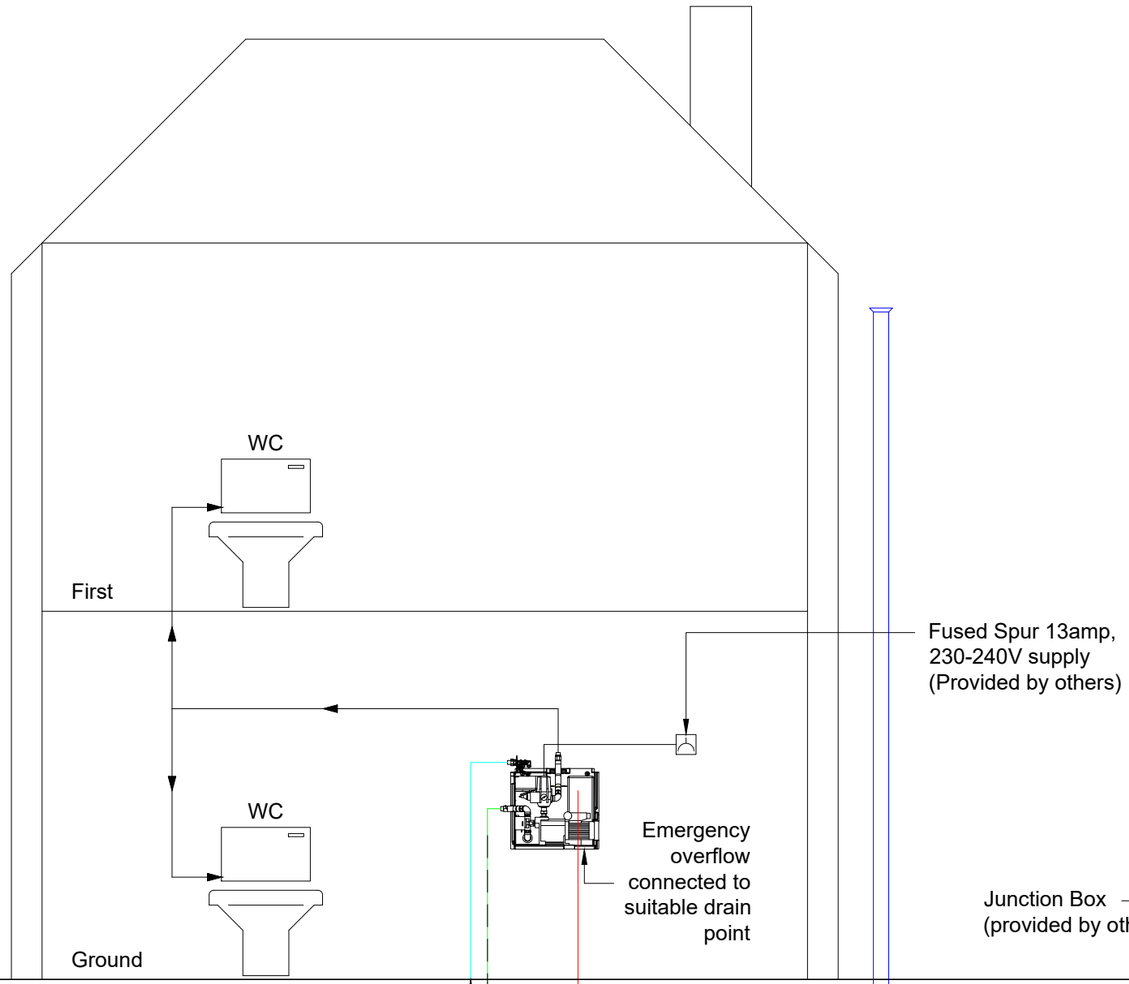

AA SILENTIO PUMP CONSOLE SETUP

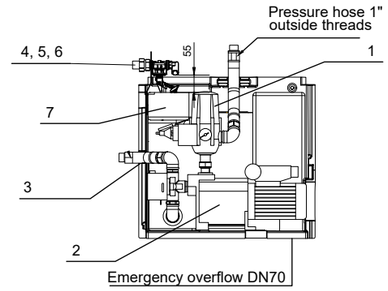



1. Controlmatic
2. KSB pump 15/4 or 25/4
3. Suction pipe outside threads (1" 3-way valve)
4. 17mm vertical guide float valve (nozzle with aerator)
5. Stainless steel bracket
6. Mains water inlet (brass Screw Connection (IG 3/ 4" x AG 3/4"))
7. Water reservoir

NOTE:- Tank accessory suitability may vary depending on project. Please contact Graf UK for sizing and support.

THIS DOCUMENT IS SUPPLIED IN STRICT CONFIDENCE AND MUST NOT BE LENT, REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT THE WRITTEN CONSENT OF GRAF UK LIMITED

DO NOT SCALE - IF IN DOUBT ASK

Notice: This drawing is issued only as a guideline and is an estimate of the materials required to construct the drainage system, it should not be used for construction purposes.

Graf UK Ltd makes no warranty or guarantee in relation to the suitability of any of the layout details shown on this drawing in relation to a particular scheme.

NOTES:-

1. All dimensions in mm, unless otherwise stated.
2. All dimensions are nominal and may vary within manufacturing tolerances.
3. All site temporary enabling works by others.
4. Graf products to be installed in strict accordance with Graf recommendations.
5. This drawing is intended for guidance only. Confirmation of the suitability for a particular project should be sought from the consulting engineers prior to final design or commencement of any construction works.

AA SILENTIO
CARAT-S
SCHEMATIC

REV.	DESCRIPTION	BY	DATE
P0	LATEST REVISION	DS	08/09/2025

GRAF UK Limited
GRAF UK Limited. Regen House, Beaumont Road, Banbury, Oxfordshire. OX16 1RH
T: 01608 661500 F: 01295 211333
E: info@grafuk.co.uk www.grafuk.co.uk

DRAWN : KS DATE : 08/09/2025
CHECKED : FC SCALE : VARIOUS@A3

PROJECT
GRAF STANDARD DETAILS

DESCRIPTION
AA SILENTIO
RAINWATER HARVESTING SYSTEM
CARAT-S TANK

DRAWING No. AA_SILENTIO_STANDARD_DETAIL_CARAT-S
REV. P0

TRENCH DETAILS

FOR SUFFICIENT WORKING ROOM, THE BASE AREA OF THE TRENCH MUST EXCEED THE DIMENSIONS OF THE TANK BY 500mm ON ALL SIDES.

MINIMUM DISTANCE FROM SOLID STRUCTURES TO BE 1000mm.

THE TRENCH EMBANKMENT MUST BE DESIGNED SO SLIPPAGE OR COLLAPSE OF THE EMBANKMENT WALL IS NOT TO BE ANTICIPATED.

THE CONSTRUCTION SITE MUST BE HORIZONTAL AND PLANE AND MUST GUARANTEE SUFFICIENT LOAD-BEARING CAPACITY.

THE DEPTH OF THE TRENCH MUST BE DIMENSIONED SO THAT THE MAXIMUM COVER ABOVE THE TANK IS NOT EXCEEDED (SEE BELOW DETAILS).

THE TANK AND ANY OTHER COMPONENTS THAT CARRY WATER MUST BE INSTALLED IN A FROST-FREE AREA. THE FROST-FREE DEPTH IS USUALLY APPROX. 600mm-800mm. EXACT DEPTHS CAN BE OBTAINED FROM THE RESPONSIBLY AUTHORITY.

A 150mm-200mm COMPACTED LAYER OF 10-20mm ROUND GRAIN GRAVEL IS INSTALLED AT THE BASE OF THE EXCAVATION.

MINIMUM & MAXIMUM COVER

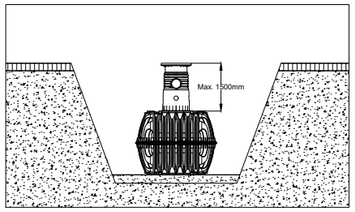

MINIMUM COVER IN A LANDSCAPED AREA TO BE 750mm
FROM SHOULDER OF TANK.

MAXIMUM COVER IN A LANDSCAPED AREA TO BE 1500mm
FROM SHOULDER OF TANK.

SLOPE/EMBANKMENT INSTALLATIONS

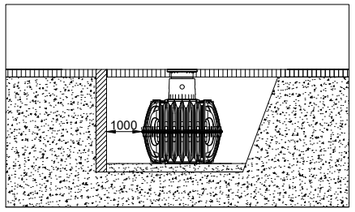

IF THE TANK IS TO BE INSTALLED IN THE IMMEDIATE VICINITY (<5m)
OF A SLOPE OR EMBANKMENT, A STATICALLY CALCULATED RETAINING WALL
MUST BE ERECTED TO ABSORB ANY ADDITIONAL LOADING FROM THE SOIL.
THE WALL MUST EXCEED THE DIMENSIONS OF THE TANK BY AT LEAST 500mm
IN ALL DIRECTIONS AND MUST BE LOCATED AT LEAST 1000mm AWAY FROM THE TANK.

GROUNDWATER INSTALLATIONS

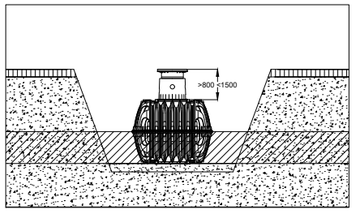

IF IT IS ANTICIPATED THAT THE TANK WILL BE IMMERSED IN GROUNDWATER DEEPER
THAN SHOWN IN THE BELOW TABLE, SUFFICIENT DISSIPATION MUST BE ENSURED.
DISSIPATION OF THE DRAINAGE WATER (E.G. VIA AN ANNULAR DRAINAGE SYSTEM)
IS RECOMMENDED IN CASES OF COHESIVE, WATER-IMPERMEABLE SOIL.

TANK SIZE	2,700L	3,750L	4,800L	6,500L
IMMERSION DEPTH	700mm	795mm	910mm	1050mm

MINIMUM COVER TO BE 800mm FROM SHOULDER OF TANK
IN AREAS WITH GROUNDWATER.
MAXIMUM COVER TO BE 1500mm FROM SHOULDER OF TANK
IN AREAS WITH GROUNDWATER.

INSERTION & FILLING

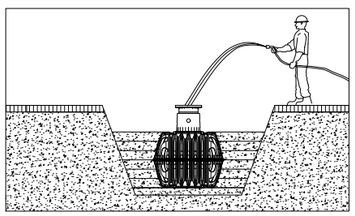

THE TANK MUST BE INSERTED, IMPACT-FREE, INTO THE PREPARED TRENCH
USING SUITABLE EQUIPMENT.
THE TANK IS FILLED WITH ½ WATER BEFORE BACKFILLING.
THE 10-20mm ROUND GRAIN GRAVEL IS BACKFILLED IN LAYERS OF MAX. 300mm STEPS
AND IS TO BE WELL COMPACTED WITH A MANUAL TAMPER.
MECHANICAL COMPACTION MACHINES ARE NOT TO BE USED UNDER ANY CIRCUMSTANCES.
SURROUND MUST BE AT LEAST 500mm ON ALL SIDES OF THE TANK.

VEHICLE LOADING CONDITIONS

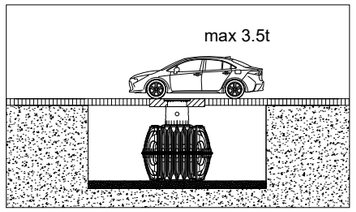

FOR LOADINGS OF UP TO 3,500KG IN TRAFFICKED AREAS WITH NO GROUNDWATER, THERE MUST BE;

MINIMUM COVER OF 800mm FROM THE SHOULDER OF THE TANK, AND

MAXIMUM COVER OF 1500mm FROM THE SHOULDER OF THE TANK.

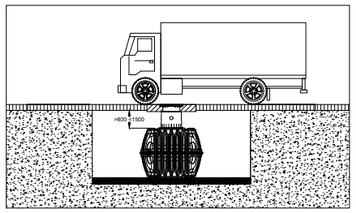

FOR LOADINGS OF MORE THAN 3,500KG AND UP TO 12,000KG IN AREAS OF NO GROUNDWATER, THERE MUST BE;

MINIMUM COVER OF 800mm FROM THE SHOULDER OF THE TANK,

MAXIMUM COVER OF 1500mm FROM THE SHOULDER OF THE TANK, AND

SUITABLE MANHOLE COVER & FRAME (PROVIDED BY OTHERS).

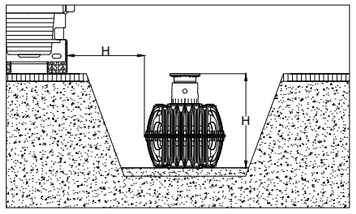

FOR INSTALLATIONS ADJACENT TO SURFACES USED BY VEHICLES OF OVER 3,500KG, THE TANK MUST BE INSTALLED AT A DISTANCE FROM THE ROAD SURFACE THAT IT AT LEAST THE DEPTH OF THE TRENCH.

PIPE CONNECTIONS

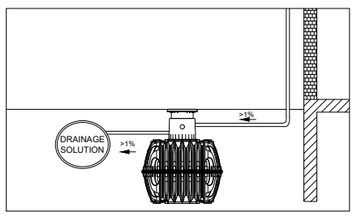

ALL PIPE CONNECTIONS MUST BE INSTALLED WITH A FALL OF AT LEAST 1%
IN THE DIRECTION OF FLOW (POSSIBLE, SUBSEQUENT SETTLING MUST BE
TAKEN INTO ACCOUNT).
IF THE TANK OVERFLOW IS CONNECTED TO A PUBLIC SEWER, THIS MUST BE
PROTECTED AGAINST REFLUX BY MEANS OF A LIFTING STATION OR REFLUX
SEAL IN ACCORDANCE WITH DIN 1986.
ALL SUCTION, PRESSURE & CONTROL LINES MUST BE INSTALLED IN AN
EMPTY PIPE / DUCT AND AS STRAIGHT AS POSSIBLE.
ANY NECESSARY BENDS MUST BE FORMED IN 30 DEGREE MOULDED
SECTIONS.
IMPORTANT: THE EMPTY PIPE / DUCT MUST BE CONNECTED TO AN APERTURE
ABOVE THE MAX. WATER LEVEL.

PLEASE REFER TO TANK INSTALLATION GUIDE FOR DETAILS ON; SAFETY, PRODUCT FEATURES, IDENTIFICATION OBLIGATIONS, TECHNICAL DATA, TANK STRUCTURE, TANK ASSEMBLY & SERVICING AND INSPECTION.

THIS DOCUMENT IS SUPPLIED IN STRICT CONFIDENCE AND MUST NOT BE LENT, REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT THE WRITTEN CONSENT OF GRAF UK LIMITED

DO NOT SCALE - IF IN DOUBT ASK

Notice: This drawing is issued only as a guideline and is an estimate of the materials required to construct the drainage system, it should not be used for construction purposes.

Graf UK Ltd makes no warranty or guarantee in relation to the suitability of any of the layout details shown on this drawing in relation to a particular scheme.

NOTES:-

1. All dimensions in mm, unless otherwise stated.
2. All dimensions are nominal and may vary within manufacturing tolerances.
3. All site temporary enabling works by others.
4. Graf products to be installed in strict accordance with Graf recommendations.
5. This drawing is intended for guidance only. Confirmation of the suitability for a particular project should be sought from the consulting engineers prior to final design or commencement of any construction works.

AA SILENTIO CARAT-S INSTALLATION

REV.	DESCRIPTION	BY	DATE
P0	LATEST REVISION	KS	08/09/2025

GRAF UK Limited
GRAF UK Limited. Regen House, Beaumont Road, Banbury, Oxfordshire. OX16 1RH
T: 01608 661500 F: 01295 211333
E: info@grafuk.co.uk www.grafuk.co.uk

DRAWN : KS DATE : 08/09/2025
CHECKED : FC SCALE : VARIOUS@A3

PROJECT
GRAF STANDARD DETAILS

DESCRIPTION
AA SILENTIO
RAINWATER HARVESTING SYSTEM
CARAT-S TANK

DRAWING No. AA_SILENTIO_STANDARD_DETAIL_CARAT-S
REV. P0